

Medical Analytical Table top Refrigerated Centrifuge For Hospital

Our Product Introduction

for more products please visit us on mkecentrifuge.com


Basic Information

- Certification: CE,ISO13485,ISO9001,SFDA
- Model Number: TR21-MU (old model:VL-200R)
- Minimum Order Quantity: 1
- Price: Negotiable
- Packaging Details: Wooden Box
- Delivery Time: 7-15 work days
- Payment Terms: L/C,D/A,D/P,T/T,Western Union,MoneyGram
- Supply Ability: 100 set/month



Product Specification

- Applications: Hospitals,Veterinary Clinics,Food Labs,Universities & Colleges,Pharmaceutical Labs,Cell Culture Labs
- Max Speed: 21000rpm
- Max RCF: 31554xg
- Max Capacity: 4*750ml
- Temperature Control Range: -20°C +40°C
- Matched Rotors: Fixed Angle Rotors,swing Out Rotors
- Display: LCD
- Warranty: 1 Year Warranty For The Whole Machine, 3 Years Warranty For The Compressor And 5 Years Warranty For The Motor. Free Replacement Parts And Shipping Within Warranty.
- Highlight: **Medical refrigerated centrifuge benchtop, Hospital refrigerated centrifuge benchtop, Hospital small refrigerated centrifuge**

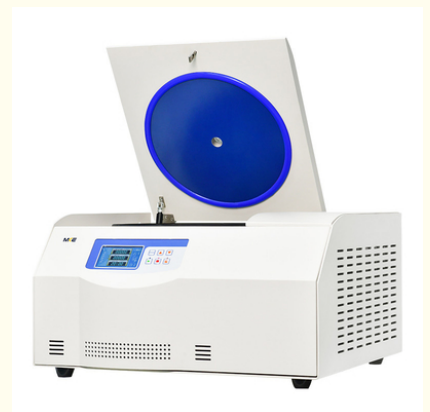

More Images



Product Description

High speed refrigerated centrifuge TR21-MU is typically used in scientific research and medical laboratories to separate substances of different densities in a sample. The refrigeration feature allows for temperature control during the separation process, which is important for maintaining the integrity of certain samples.

Design

- Metal housing, metal lid, and stainless steel centrifuge chamber are autoclave-able and resistant detergents and disinfection liquids.
- Observations window on lid for speed calibration and noise measurement.
- Microprocessor control with frequency conversion A.C. motor drive
- LCD Display the parameters of Speed, Timer, RCF, Rotors, Program(Memory), Acceleration& Deceleration information and Error code information.
- Double layers sealing ring made for the centrifuge lid and the instrument to keep long good sealing.



User friendly

- CFC free refrigeration system, Pre-cooling feature, Precise temperature control up to -20°C .
- Programmable and storable, stores up to 30 programs and provides direct user access with one keystroke save. The stored parameter: combination remains in the memory even after the centrifugation has been switched off.
- Provides the 10 acceleration rates and 10 braking ramp, to effectively avoid secondary sedimentation, with better centrifugation effect.
- Automatic lid-locking and holding during rotor run
- Easily exchangeable rotors, special rotor connector which makes it easy to load and unload rotor.
- Automatic troubleshooting with indication of error code and alarm on the screen.
- "Mute" patent technology. Noise level lower than 58 decibel at the highest rotational speed.
- Automatic rpm/rcf conversion
- Automatic rotor identification system, coded rotor identification prevents the rotor from over speeding.



Safety

- Produced according to international safety regulations (e.g. IEC 61010)
- Safety Electrical lid interlock, door can not open when rotor is running and machine won't run when lid open and error code appears.
- Emergency lid-lock release when power failure (very useful in an unexpected power interruption).
- Gas hinge for lid drop protection.
- Safety protections are made for the over speed, over heating (motor, chamber), imbalance etc to ensure the man machine safety.



Professional
Centrifuge
Manufacturer

Hunan Michael Laboratory Instrument Co.,Ltd.



+86-17775883371



Shirley@mke-lab.com



mkecentrifuge.com

MKE Building, Sanhe Zhihui Industrial Park, Guyuan Road No. 426, Changsha High-tech Development Zone,
Hunan, China