

750ml 600ml 500ml 250ml High Speed Refrigerated Centrifuge Adjustable Speed And Customized

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:



VL-200R

China



Product Specification

Control:	Microprocessor Based
 Max Capacity: 	4×750ml
 Rotor Compatibility: 	Fixed Angle Rotors And Swing Rotors
Programmable Operations:	30
• Max Rpm:	20000rpm
 Applications: 	Scientific Research, Medical Laboratories
 Temperature Accuracy: 	±1°C
• Max Rcf:	28174 Xg
• Attributes:	Stainless Steel Inner Liner, Array
 Product Type: 	High Speed Refrigerated Centrifuge
 Highlight: 	750ml Refrigerated Centrifuge, Adjustable Speed Refrigerated Centrifuge, Customized Refrigerated Centrifuge



More Images



for more products please visit us on mkecentrifuge.com

Product Description

High speed refrigerated centrifuge VL-200R is typically used in scientific research and medical laboratories to separate substances of different densities in a sample. The refrigeration feature allows for temperature control during the separation process, which is important for maintaining the integrity of certain samples.

Application:

The combination of high speed and refrigeration capabilities ensures precise temperature control during centrifugation, preserving sample integrity and allowing for sensitive experiments and analyses.

They are essential for separating substances of different densities in biological and chemical samples, such as DNA, proteins, and cells. These centrifuges are particularly valuable in fields like molecular biology, biochemistry, and clinical diagnostics, enabling researchers to isolate and purify target components efficiently.

Tech Specs

Speed range(rpm)	0-20000rpm adjustable		1-99minutes 59s adjustable
Max Capacity(ml)	4*750ml	Speed accuracy	±10r/min
RCF range (xg)	0-28174xg adjustable	ACC/DEC	1-10 rates
Temperature control range	-20°C +40°C	Temperature control accuracy	±1°C
Noise(dBA)	15:08(1B(A)	Net weight(without rotor)	110KGS
Power supply	AC220V,50HZ,10A, 1300W	II JIMENSION(MM)	680x580x420mm(LxW xH)

Matched Rotors

Item	Max. capacity	Max.speed	Max.RCF	Note
Angle rotor	12x1.5/2.2ml	20000r/min	28174xg	PP/PC tube
Adapter	12x0.5ml			PP/PC tube
	12x0.2ml			PP/PC tube
Angle rotor	12x5ml	19000r/min	25830xg	PP/PC tube
Adapter	12x1.5ml			PP/PC tube
	24x1.5/2.2ml	16000r/min	24041xg	PP/PC tube
	24x0.5ml			PP/PC tube
	24x0.2ml			PP/PC tube
	10x15ml	15000*/min	26161xg	PP/PC tube
Adapter	10x10ml			PP/PC tube
Adapter	10x5ml			PP/PC tube
Adapter	10x1.5ml	1		PP/PC tube
Angle rotor	48×1.5/2.2ml	1	23394xg	PP/PC tube
Adapter	48x0.5ml	15000r/min		PP/PC tube
Adapter	48x0.2ml	1		PP/PC tube
Angle rotor	12×10ml	1	21130xg	PP/PC tube
Adapter	12×5ml	15000r/min		PP/PC tube
Adapter	12x1.5ml	1		PP/PC tube
Angle rotor	6×50ml	1		PP/PC tube
Adapter	6×15ml	- 14000r/min	21255xg	PP/PC tube
Adapter	6×10ml			PP/PC tube
Adapter	6×1.5ml			PP/PC tube
Angle rotor	6×100ml	- -11000r/min	14610xg	PP/PC tube
	6×50ml			PP/PC tube
	6×15ml			PP/PC tube
	6×10ml			PP/PC tube
	6×5ml			PP/PC tube
	6×1.5ml			PP/PC tube
	8×50ml	- 12000r/min	17226xg	PP/PC tube
	8×15ml			PP/PC tube
	8×10ml			PP/PC tube
	8×1.5ml			PP/PC tube
	4×250ml	- - 4000r/min -	3049×g	Round cup
	4×9x5/2ml			PP/PC tube
	4×5x15/10ml			PP/PC tube
	4×50ml			PP/PC tube
Adapter	4×100ml			PP/PC tube
Adapter	4×9x1.5ml			PP/PC tube
Swing bucket	4×400ml	-		Square cup
Adapter	4×16x5/2ml			PP/PC tube
-	1			
Adapter	4×9x15/10ml	4000r/min		PP/PC tube
	AdapterAdapterAdapterAngle rotorAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterAdapterA	Adapter12x0.5mlAdapter12x0.2mlAngle rotor12x5mlAdapter12x1.5mlAdapter24x1.5/2.2mlAdapter24x0.5mlAdapter24x0.2mlAdapter10x15mlAdapter10x10mlAdapter10x10mlAdapter10x1.5mlAdapter48x0.5mlAdapter48x0.5mlAdapter12x10mlAdapter48x0.2mlAdapter12x5mlAdapter12x5mlAdapter12x5mlAdapter6x50mlAdapter6x50mlAdapter6x15mlAdapter6x10mlAdapter6x10mlAdapter6x50mlAdapter6x50mlAdapter6x50mlAdapter6x10mlAdapter6x50mlAdapter6x50mlAdapter6x10mlAdapter6x10mlAdapter6x10mlAdapter6x10mlAdapter8x10mlAdapter8x15mlAdapter8x15mlAdapter8x15mlAdapter8x15mlAdapter4x250mlAdapter4x250mlAdapter4x50mlAdapter4x50mlAdapter4x50mlAdapter4x50mlAdapter4x50mlAdapter4x50mlAdapter4x50mlAdapter4x50mlAdapter4x50mlAdapter4x50ml	Adapter 12x0.5ml 20000r/min Adapter 12x0.2ml 19000r/min Angle rotor 12x5ml 19000r/min Adapter 12x1.5ml 19000r/min Adapter 24x1.5/2.2ml 16000r/min Adapter 24x0.5ml 16000r/min Adapter 24x0.2ml 16000r/min Adapter 10x15ml 15000r/min Adapter 10x10ml 15000r/min Adapter 10x15ml 15000r/min Adapter 10x1.5ml 15000r/min Adapter 10x1.5ml 15000r/min Adapter 48x0.2ml 15000r/min Adapter 48x0.2ml 15000r/min Adapter 48x0.2ml 15000r/min Adapter 12×10ml 15000r/min Adapter 6×10ml 14000r/min Adapter 6×15ml 14000r/min Adapter 6×15ml 14000r/min Adapter 6×15ml 11000r/min Adapter 6×50ml 44apter <td>Adapter 12x0.5ml 20000r/min 28174×g Adapter 12x0.2ml 19000r/min 28174×g Angle rotor 12x5ml 19000r/min 25830×g Adapter 12x1.5ml 19000r/min 25830×g Adapter 24×1.5/2.2ml 16000r/min 24041×g Adapter 24×0.2ml 16000r/min 24041×g Adapter 10×15ml 16000r/min 24041×g Adapter 10×15ml 15000r/min 26161×g Adapter 10×15ml 15000r/min 23394×g Adapter 10×15ml 15000r/min 23394×g Adapter 48×0.2ml 15000r/min 23394×g Adapter 48×0.2ml 15000r/min 2130×g Adapter 48×0.2ml 15000r/min 2130×g Adapter 12×5ml 15000r/min 21130×g Adapter 6×15ml 14000r/min 21255×g Adapter 6×15ml 14000r/min 14610×g Adapter 6×50ml 12000r/min<!--</td--></td>	Adapter 12x0.5ml 20000r/min 28174×g Adapter 12x0.2ml 19000r/min 28174×g Angle rotor 12x5ml 19000r/min 25830×g Adapter 12x1.5ml 19000r/min 25830×g Adapter 24×1.5/2.2ml 16000r/min 24041×g Adapter 24×0.2ml 16000r/min 24041×g Adapter 10×15ml 16000r/min 24041×g Adapter 10×15ml 15000r/min 26161×g Adapter 10×15ml 15000r/min 23394×g Adapter 10×15ml 15000r/min 23394×g Adapter 48×0.2ml 15000r/min 23394×g Adapter 48×0.2ml 15000r/min 2130×g Adapter 48×0.2ml 15000r/min 2130×g Adapter 12×5ml 15000r/min 21130×g Adapter 6×15ml 14000r/min 21255×g Adapter 6×15ml 14000r/min 14610×g Adapter 6×50ml 12000r/min </td

	Adapter	4×100ml]		PP/PC tube
	Adapter	4×15x1.5ml	1		PP/PC tube
	Swing bucket	4×500ml	4000r/min		Round cup
NO.12	Adapter	4×17x5/2ml		3354xg	PP/PC tube
10.12	Adapter	4×8x15/10ml			PP/PC tube
	Adapter	4×3x50ml			PP/PC tube
	Adapter	4×100ml			PP/PC tube
	Swing bucket	4×600ml	4000r/min	3354×g	Square cup
	Adapter	4×25x5/2ml			PP/PC tube
NO.13	Adapter	4×12x15/10ml			PP/PC tube
	Adapter	4×5x50ml	1		PP/PC tube
	Adapter	4×4x100ml	1		PP/PC tube
	Swing bucket	4×750ml	1	3443xg	Round cup
	Adapter	4×26x5/2ml	1		PP/PC tube
NO.14	Adapter	4×13x15/10ml	4000r/min		PP/PC tube
	Adapter	4×5x50ml	1		PP/PC tube
	Adapter	4×3x100ml	1		PP/PC tube
NO.15	Microplate 2×2×96 hole	4200r/min	2860xg	Square cup	
	Adapter	2×32×1.5ml	1		PP/PC tube

Design

Intelligent microprocessor control system that can display set and actual parameters simultaneously. Frequency conversion A.C. motor drive, maintenance-free.

304# Stainless steel centrifuging chamber.

Housing and lid of metal finished in a scratch and impact resistant coating.

Aluminium alloy fixed angle rotor, stainless steel swing out rotor.

Rotors and buckets are autoclavable and corrosion-free.

Durable chassis with steel armored chamber and steel layered lid.

Smooth tube insertion and removal facilitated by precisely carved holes in rotors and buckets.

User friendly

LCD/TFT display panel for optional, and highly visible display screen.

CFC-free refrigerant.

RTC (Real-Time Control) Function

PID dynamic temperature control.

Temperature range from -20°C to 40°C in 1°C steps.

Reversible parameters during operation

Up to 30 program memory and easily retrieved.

Last set parameters recall(useful for repetitive analysis)

Adjustable Accel/Decel, 10 acceleration and 10 deceleration ramps.

Automatic lid-locking and holding during rotor run.

Viewing port in the lid for speed calibration and noise measurement.

Safety

Automatic RFID rotor identification with over-speed protection.

Active imbalance detection and shutdown.

Safety lid interlock to prevent lid opening during centrifugation

Lid drop protected construction and fine control of lid opening.

Emergency door lock release enables opening in case of power failure or sudden stoppages.

Safety and Standards Certification: CE

Product Safety: EN61010-1 and EN 61010-2-020 Electromagnetic Compatibility: EN 61326-1.

WHY CHOOSE US

- Direct from the Manufacturer: Enjoy competitive pricing on all our products.
- Certified Excellence: Experience premium quality with our CE and ISO certified products.
- Customization at Its Best: Benefit from our robust OEM and ODM capabilities tailored to your specific needs.
- Reliable Production and Delivery: Trust us for guaranteed on-time production and delivery of your orders.
- Comprehensive Support: Rely on our comprehensive after-sales service, including complimentary product accessories.
- Expertise You Can Trust: We stand behind our 15 years of experience in R&D and production of medical centrifuge machines.



Our Factory Introduction

We have a standardized production workshop operated by a dedicated team that ensures quality in every laboratory centrifuge and lab equipment we produce. Our R&D division includes design engineers, technology specialists, qualified experts, and process control managers. Following a strict quality control system, our specialists oversee the entire production process, from design and R&D to testing, production, quality inspection, and packaging.

- Specialize in centrifuges.
- With decades of experience, we've exported to 80+ countries.
- Proven Reputation: SGS and Intertek inspected, underlining our reliablity.
- Manufacturing Capabilities: 6 floors, 3000 sqm each, dedicated to manufacturing and quality control.




MKE Exhibition



Packaging & Delivery

MKE centrifuges are securely packaged in wooden cases or carton boxes, selected according to the weight and size of the goods. This ensures they are delivered in excellent condition to customers worldwide.

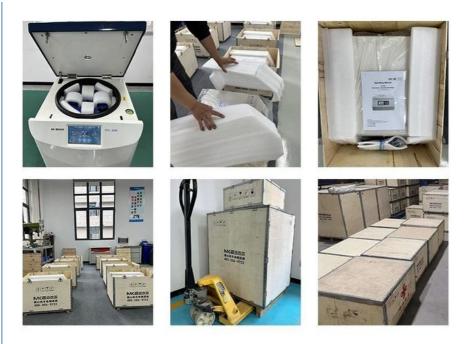

After-Sale WARRANTY



<u>FAQ</u>

Q: How long is the production lead time?

A: Within 7-15 workdays after receiving deposit.

Q: What's your warranty?

A: All MKE products have ONE year warranty, five-year motor warranty. We won't charge clients any money for repairing the machine during one-year warranty time, the freight is also on us.

Q: How about the sample of MKE Centrifuge?

A: We could send you the samples but the freightand the sample are charged.

Q: Which kinds of Certificate would you have?

A: ISO9001, ISO13485, CE

Q: Do you offer centrifuges with voltage and plug options suitable for my country/region?

A: Yes, we provide centrifuges with various voltage and plug options to meet different country/region requirements. Please let us know your specific needs, and we will ensure compatibility.

Q: Are there customized options available for specific applications?

A: Absolutely! We offer customization options to meet specific application needs. Let us know your requirements, and we will tailor the centrifuge accordingly.

